



Custom Interconnects

FUZZ BUTTON PERFORMANCE

Socket, Fixtures and Interposers *For RF, Coaxial, Hybrid and Hi-Rel Applications*

- + High frequency > 40 GHz and beyond
- + Extreme temperatures > -60°C to 150° C
- + Extended lifecycles > up to 800K mates/demates
- + Superior current capability > 5 Amps

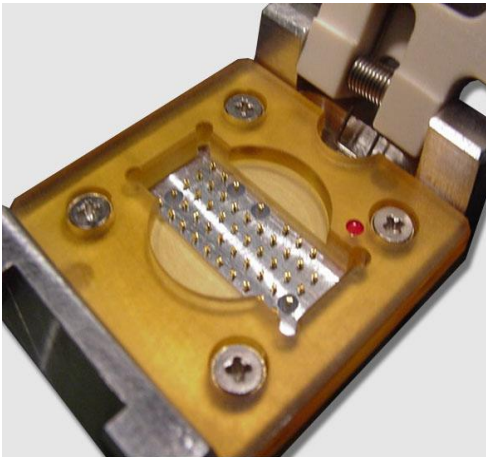

Excellent Impedance Matching
Teflon-Sleeved Fuzz Buttons For Isolations
Standard Fuzz Buttons For Grounds
Aluminum Carriers For Added Ground Plane
Moulded Dielectrics Available For Volume Production
Limitless Array Configurations