



# HARDHATS

*Hardhats are the drivers behind maximizing the full potential of Fuzz Buttons®. With the added advantages of increased life spans, stack-up retention and solder mask wiping; the Fuzz Button®/Hardhat contact system combines unsurpassed quality, value and performance.*



Hardhats are designed to match-up with small format Fuzz Buttons® and are ideally suited for test sockets, test fixtures, connectors, interposers and interconnects.

- Standard Diameters: .010", .015", .020", .030"
- Standard Tip Configurations: Flat, Tapered, Crown and Serrated
- Standard Material: Gold-plated Beryllium Copper
- Customization Properties: Dimensional and Material

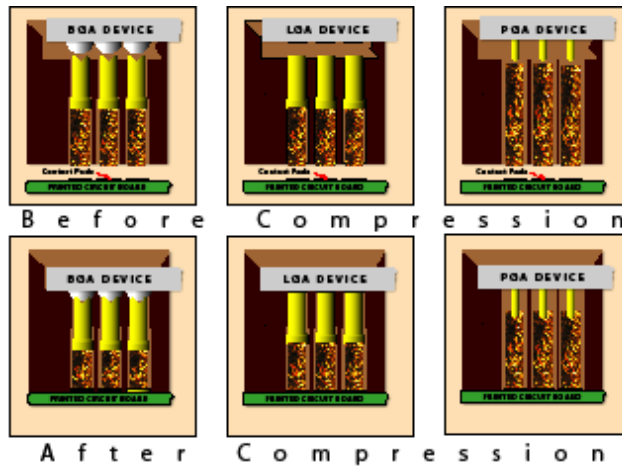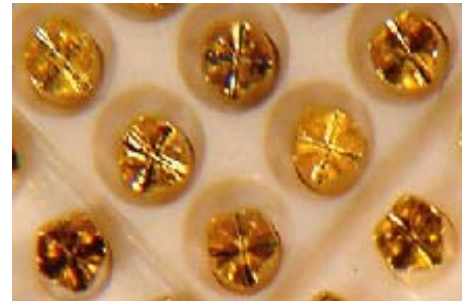

## SPECIFICATIONS

APPLICATIONS	LGA, BGA, QFN, CSP
PITCH CAPABILITY	.5MM TO 1.27MM
CURRENT CAPABILITY	15 AMPS
OPERATING TEMPERATURE	-60°C - 150°C
ACTUATION LIFECYCLES	500K+

**Custom Interconnects**

*FUZZ BUTTON® PERFORMANCE*

<http://www.custominterconnects.com>  
[salesinfo@custominterconnects.com](mailto:salesinfo@custominterconnects.com)